


Spa34 Speaker

Install Guide

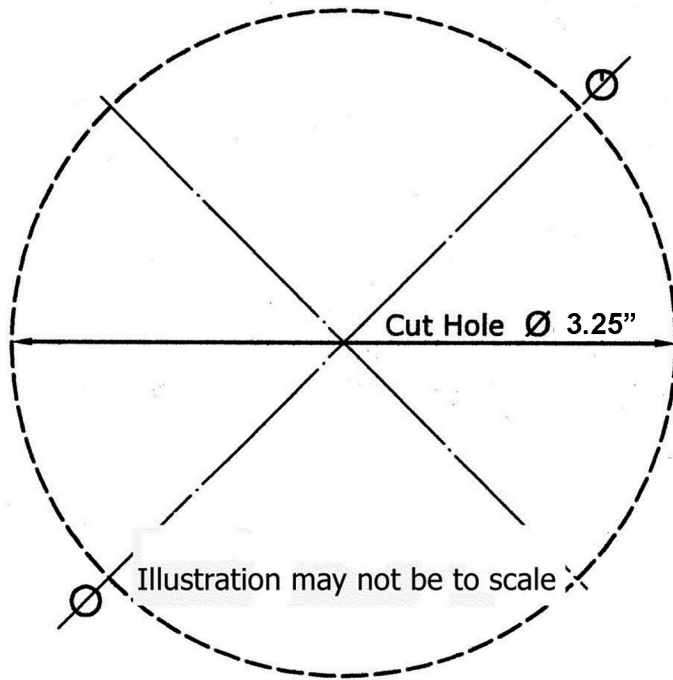

- 1- Find a location which allows speaker to lay flat
- 2- Use template for approximate spacing
- 3- Mark and cut a 82mm / 3.25" mounting hole
- 4- Position speaker in hole
- 5- Feed speaker wires thru nut prior to attaching speaker wires
- 6- Connect (+) speaker to large tab / (-) speaker wire to small tab
- 7- Apply small amount of non-caustic silicone to rear of gasket
- 8- Apply small amount of non-caustic silicone to flange of nut
- 9- Tighten wall-fitting nut firmly and securely. DO NOT overtighten.

PRODUCT NOTICE: The internal LED show (LD models only) is a function of low (bass) frequency & volume. At low volume levels or when listening to soft music the LED may not illuminate.

NOTE: When Using Silicone Sealant Do Not Allow Any To Make Contact With Speaker Cone or Surround

Specifications

Power: 50WMax

Imp: 4 or 8 ohm

Wt. <1#

Mounted Depth: 1.5"

IP65 / REACH / RoHS / CE



PO Box 6351

Ventura, CA 93006

805.794.6475 info@pqnEnterprises.com

Warranty Policy

PQN Audio products are warranted to be free of manufacturing defects for a period of one (1) year. Warranty is subject to proper installation & application. Warranty does not cover exposure to excessive chemical usage or operational abuse. Return defective product prepaid to point of purchase for replacement or refund as determined by PQN. Warranty is not transferable. Proof of Purchase must be included.

